

GAS LOG GUIDE

Determining What Is Best for Your Firebox

WHAT ARE GAS FIRE LOG SETS?


Crafted from real wood samples to meticulously recreate the look of a real wood burning fire, Gas Log Sets will add a beautiful accent to your hearth. They are made of cement/clay mix & designed to withstand high temperatures.

- Low-maintenance and gives that real log look
- Available in multiple sizes and styles
- Compatible with selected gas burner systems



FIREBOX MEASUREMENT GUIDE

FIREBOX MEASUREMENT GUIDE

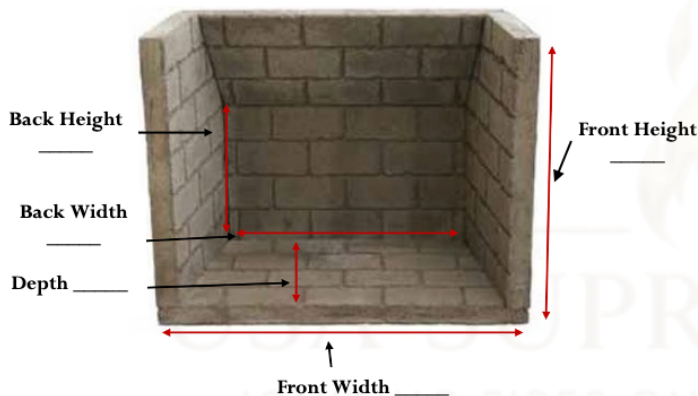

Gas Location: ☐ Left ☐ Right ☐ Rear ☐ Floor

Gas Type: ☐ Natural ☐ Propane

Ignition Desired: ☐ Match Lit ☐ Manual Safety Pilot

☐ Remote Control

Existing Media Inside Fireplace: ☐ Yes ☐ No

Firebox Bed Desired: ☐ Fireglass ☐ Lava Rock ☐ Mixed

Required measurements: front width, front height, back width, back height, and depth.

GAS LOG DETAILS

WHAT IS INCLUDED IN A GAS LOG SET?

Refractory Logs: cement/clay mixed and able to withstand high temperatures

Grate: Stabilizing the logs to create the desire flame pattern

Burner Pan (Hearth Kit): Steel pan that forms the foundation for the burner media

Gas Line Connector Kit: to connect the gas supply to the burner pan

Sand: (diffuse the natural gas) Vermiculite: (diffuse the propane gas)

Embers: installed on burner pan to create the illusion of glowing coals

ADDITIONAL OPTIONS / ACCESSORIES

Lava Rocks: installed around burner pan to decorate the hearth

Fireglass: gives more character to the firebox

Remote & Receiver: can be added to any of our Gas log sets.

IMPORTANT INFORMATION ABOUT GAS LOG SETS

Adequate ventilation is absolutely necessary when burning gas logs. Without proper ventilation carbon monoxide & smoke can be released in the home. Repositioning the logs after install is not necessary, but if desired used heat-resistant gloves or let the logs cool off before touching them. Glass doors must always be open while the gas logs are burning. Overtime black soot may appear on the outside of the logs. On new installs the logs must be burned on a low flame for at least 4 hours to break them in.

USA Supreme INC. | Phone: 832.983.9888 | Email: sales@usasupremetx.com | www.supremeservicestx.store

Visit Our Houston Showroom Today

